

FORM PTO-1390 (REV. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER NOKI14-00014	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO (If known, see 37 CFR 1.5)	
				10/018313	
INTERNATIONAL APPLICATION NO. PCT/IB00/00695		INTERNATIONAL FILING DATE 8 May 2000		PRIORITY DATE CLAIMED 9 June 1999	
TITLE OF INVENTION DETERMINATION OF THE POSITION OF A MOBILE TERMINAL					
APPLICANT(S) FOR DO/EO/US Veijo Vantinen, Haitao Tang, Jens Staack, Jonne Soininen, Ahti Muhonen, Ville Ruutu					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</li> <li>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> has been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto.</li> <li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ol> </li> <li>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</li> <li>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>					
Items 11 to 20 below concern document(s) or information included:					
<ol style="list-style-type: none"> <li>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</li> <li>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</li> <li>15. <input type="checkbox"/> A substitute specification.</li> <li>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</li> <li>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</li> <li>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</li> <li>20. <input checked="" type="checkbox"/> Other items or information: <ol style="list-style-type: none"> <li>A. Certificate of Mailing by Express Mail</li> <li>B. Postcard Receipt</li> </ol> </li> </ol>					

U.S. APPLICATION NO. (if known) <b>10/018313</b> INTERNATIONAL APPLICATION NO. <b>PCT/IB00/00695</b>				ATTORNEY'S DOCKET NUMBER <b>NOKI14-00014</b>																															
<b>21. <input checked="" type="checkbox"/> The following fees are submitted:</b> <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... <b>\$1040.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$890.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$740.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$710.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b>  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS PTO USE ONLY</b>																															
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 890.00																															
<table border="1" style="width:100%; border-collapse: collapse;"><thead><tr><th style="width:15%;">CLAIMS</th><th style="width:20%;">NUMBER FILED</th><th style="width:20%;">NUMBER EXTRA</th><th style="width:15%;">RATE</th><th style="width:15%;">\$</th><th style="width:15%;"></th></tr></thead><tbody><tr><td>Total claims</td><td>65 - 20 =</td><td>45</td><td>x <b>\$18.00</b></td><td>\$ 810.00</td><td></td></tr><tr><td>Independent claims</td><td>5 - 3 =</td><td>2</td><td>x <b>\$84.00</b></td><td>\$ 168.00</td><td></td></tr><tr><td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td><td>+ <b>\$280.00</b></td><td>\$</td></tr><tr><td colspan="4"><b>TOTAL OF ABOVE CALCULATIONS =</b></td><td>\$ 978.00</td><td></td></tr></tbody></table> <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$		Total claims	65 - 20 =	45	x <b>\$18.00</b>	\$ 810.00		Independent claims	5 - 3 =	2	x <b>\$84.00</b>	\$ 168.00		MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ <b>\$280.00</b>	\$	<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 978.00		\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$																															
Total claims	65 - 20 =	45	x <b>\$18.00</b>	\$ 810.00																															
Independent claims	5 - 3 =	2	x <b>\$84.00</b>	\$ 168.00																															
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ <b>\$280.00</b>	\$																														
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 978.00																															
<b>SUBTOTAL =</b>				\$ 1868.00																															
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$																															
<b>TOTAL NATIONAL FEE =</b>				\$ 1868.00																															
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31): <b>\$40.00</b> per property +				\$																															
<b>TOTAL FEES ENCLOSED =</b>				\$ 1868.00																															
				<b>Amount to be refunded:</b>	\$																														
				<b>charged:</b>	\$																														
<p>a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1868.00</u> to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. <u>50-0208</u> in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>50-0208</u>. A duplicate copy of this sheet is enclosed.</p> <p>d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.</p>																																			
<p><b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.</b></p> <p>SEND ALL CORRESPONDENCE TO</p> <div style="text-align: right; margin-top: 20px;"> _____ SIGNATURE Robert H. Kelly _____ NAME 33,922 _____ REGISTRATION NUMBER</div>																																			

DOCKET NO. NOKI14-00014

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: : VEIJO VANTTINEN, ET AL.  
International Appl. No. : PCT/IB00/00695  
International Filing Date : 9 June 1999  
Title : DETERMINATION OF THE POSITION OF A MOBILE  
TERMINAL

BOX PCT  
U.S. Patent and Trademark Office  
P.O. Box 2327  
Arlington, VA 22202

Sir:

**PRELIMINARY AMENDMENT**

Please amend the above-identified patent application as follows:

**IN THE CLAIMS:**

Please cancel claims 1-65 and substitute therefor, claims 66-130 as follows:

66. (New) A method of providing information on the location of an first entity, said first entity being connectable to a communication network via a second entity, said method comprising the steps of:

defining an association between said first entity and a second entity, said association comprising information identifying said first entity and information identifying said second entity;

determining the location of said second entity; and based on said association, providing information on the location of said first entity.

**DOCKET NO. NOKI14-00014**  
**PATENT**

67. (New) A method as claimed in claim 66, further comprising the steps of storing association between the first entity and the second entity.

68. (New) A method as claimed in claim 67, wherein the association is stored in a store external to said network.

69. (New) A method as claimed in claim 68, wherein said store is arranged to store information identifying said network.

70. (New) A method as claimed in claim 66, comprising the step of the first entity requesting identifying information from the second entity.

71. (New) A method as claimed in claim 68, further comprising the step of the first entity sending information identifying said second entity to said store.

72. (New) A method as claimed in claim 68, wherein the first entity sends information identifying the first entity to the store.

73. (New) A method as claimed in claim 66, wherein said communication network is a wireless network.

74. (New) A method as claimed in any preceding claim 66, wherein said network is a cellular network.

75. (New) A method as claimed in claim 66 wherein said second entity is a mobile terminal.

76. (New) A method as claimed in claim 75, wherein said information identifying said mobile terminal is one or more of its MSISDN and its PDP address.

**DOCKET NO. NOKI14-00014**  
**PATENT**

77. (New) A method as claimed in claim 66, wherein said first entity is an IP entity.

78. (New) A method as claimed in claim 77, wherein said information identifying said IP entity is an IP address.

79. (New) A method as claimed in claim 66, wherein said first entity is a portable computer.

80. (New) A method as claimed in claim 66, wherein an authentication procedure is performed between the first entity and the second entity.

81. (New) A method as claimed in claim 66, wherein an authentication procedure is performed between the first entity and the communication network.

82. (New) A method as claimed in claim 66, wherein said first entity is arranged to request an IP address and said network allocates an address.

83. (New) A method as claimed in claim 66, wherein the first identity is arranged to establish a connection with an IP location service provider and to provide the IP location service provider with the information identifying the first entity and the information identifying the second entity.

84. (New) A method as claimed in claim 66, wherein the information identifying the first entity and the information identifying the second entity is provided to an IP location server via the communications network.

85. (New) A method as claimed in claim 66, wherein the first entity is provided with information relating to the identity of the second entity.

86. (New) A network comprising a first entity and a second entity, said first entity being connectable to a communication network via a second entity, said network comprising means for storing an association comprising information identifying said first entity and information identifying second entity, whereby the location of said first entity is determined by determining the location of the second entity associated with said first entity.

87. (New) A network comprising a first station and an entity which is arranged to store information relating to the location of said first station, at least one network element being provided between the first station and said entity, said entity being arranged to receive requests relating to the location of said first station from a requester external to said network.

88. (New) A network as claimed in claim 87, wherein said entity has an interface with an external element.

89. (New) A network as claimed in claim 88, wherein said external element is a communications element which permits the entity to communicate to outside said network.

90. (New) A network as claimed in claim 87, wherein said external element is the Internet.

91. (New) A network as claimed in claim 87, wherein said requester communicates with said external element.

92. (New) A network as claimed in 87, wherein a plurality of networks are provided, said networks being arranged to communicate via said external element.

**DOCKET NO. NOKI14-00014**  
**PATENT**

93. (New) A network as claimed in claim 92, wherein said entity is arranged to store information defining in which network said first station is in.

94. (New) A network as claimed in claim 92, wherein each of said networks comprises an entity.

95. (New) A network as claimed in claim 87, wherein said entity is arranged to forward the request to a respective network element in accordance with the information stored in said entity.

96. (New) A network as claimed in claim 95, wherein said network element is a CMLC.

97. (New) A network as claimed in claim 95, wherein said network element is arranged to direct a response back to said requester.

98. (New) A network element as claimed in claim 92, wherein if said first station is in a different network, the request from the requester is forwarded by the entity to the network in which the first station is located.

99. (New) A network comprising a first station which is in communication with at least one network element, said first station being arranged, in use, to establish communication with an element external to said network via said at least one network element, wherein said external network is arranged to send a request for information on the location of the first station to said first station, said request being carried via the same means as user information from the external to the first station.

**DOCKET NO. NOKI14-00014**  
**PATENT**

100. (New) A network as claimed in claim 99, wherein a transmission plane is provided between said first station and said external network, said request and user information being sent to the first station via the transmission plane.

101. (New) A network as claimed in claim 99, wherein one of said first station and said at least one network element is provided with a dedicated address for receiving the request from said external network for information as to the location of the first station.

102. (New) A network as claimed in claim 101, wherein information on the location of the first station is provided to said external network via said dedicated address.

103. (New) A network as claimed in claim 101, wherein said dedicated address is a dedicated port within a user address.

104. (New) A network as claimed in claim 101, wherein the user information is received by and/or transmitted from a location in one of said first station and at least one network which is different to the dedicated address.

105 (New) A network as claimed in claim 99, wherein said information station is allocated an address, said address being unique to said first station.

106. (New) A network as claimed in claim 99, wherein said first station is allocated an address, said address being reallocated to different first stations when no longer required by said first station.

107. (New) A network as claimed in claim 106, wherein said address is allocated by said at least one network element.



**DOCKET NO. NOKI14-00014  
PATENT**

108. (New) A network as claimed in claim 101 or any claim appended thereto, wherein said dedicated address is located in said first station.

109. (New) A network as claimed in claim 108, wherein said at least one network element is transparent to information sent between said first station and said external network.

110. (New) A network as claimed in claim 108, wherein said first station is arranged to obtain information as to its position in response to a request received at its dedicated address.

111. (New) A network as claimed in claim 110, wherein the first station is arranged to calculate the position of the first station.

112. (New) A network as claimed in claim 110, wherein said first station receives information as to its position.

113. (New) A network as claimed in claim 108, wherein said request from the external network includes information identifying the first station and the dedicated address.

114. (New) A network as claimed in claim 108, wherein said at least one network element is arranged to check requests from the external network to the first station and if a request identifies the dedicated address, to initiate a procedure for providing information to the external network relating to the position of the first station.

115. (New) A network as claimed in claim 99, wherein said dedicated address is in said at least one network element.

116. (New) A network as claimed in claim 114, wherein said at least one network element is arranged to obtain information identifying said first station in response to a request for the position from said external network.

117. (New) A network as claimed in claim 116, wherein said information is the dialing number of said first station.

118. (New) A network as claimed in claim 116, wherein said information identifying the first station is forwarded to a further network element, said further network element being arranged to provide information on the position of the first station identified by said information.

119. (New) A network as claimed in claim 118, wherein said position information is provided to the external network by said further network element directly or via said at least one network element.

120. (New) A network as claimed in claim 115, wherein said information identifying said first station is sent to the external network, said external network sending a further request to a further network element including said identifying information requesting information on the position of the first station, said information being forwarded to said external network.

121. (New) A network as claimed in claim 116, wherein said at least one network element obtains said information on the identity of the first station from a register.

122. (New) A network as claimed in claim 98, wherein said first station comprises a mobile station.

123. (New) A network as claimed in claim 98, wherein said network is a GPRS network.

**DOCKET NO. NOKI14-00014**  
**PATENT**

124. (New) A network as claimed in claim 123, wherein said at least one network element is a GGSN.

125. (New) A network as claimed in claim 123, wherein said further network element is a GMLC.

126. (New) A network as claimed in claim 99, wherein said external network is connected to said network via the Internet.

127. (New) A network as claimed in claim 99, wherein said network is a packet data network.

128. (New) A network as claimed in claim 99, wherein said request for information on the location of the first station relates to the geographic location of said first station.

129. (New) A network as claimed in claim 99, wherein said request for information on the location of first station causes a geographic positioning procedure to be started by said first station.

130. (New) A network comprising a first station which is a communication with at least one network element, said first station being arranged, in use, to establish a connection with an element external to said network via said at least one network element, wherein one of said first station and said at least one network element is provided with a dedicated address for receiving a request from said external network as to the location of the first station.

DOCKET NO. NOKI14-00014  
PATENT

**REMARKS:**


Substitute claims 66-130 set forth above are believed to place the application in condition for the Examiner's early examination and consideration for allowance. Examination and consideration for allowance of such claims is respectfully requested.

Respectfully submitted,

NOVAKOV DAVIS & MUNCK, P.C.

Date: 7 Dec 01

Docket Clerk  
P. O. Box 802432  
Dallas, Texas 75380  
Telephone: (214) 922-9221  
Facsimile: (214) 969-7557  
E-mail: [rkelly@novakov.com](mailto:rkelly@novakov.com)

  
Robert H. Kelly  
Registration No. 33,922

DETERMINATION OF THE POSITION OF A MOBILE TERMINAL

## FIELD OF THE INVENTION

The present invention relates to a network.

## BACKGROUND TO THE INVENTION

The General Packet Radio Service GPRS is a standard which relates to the transfer of data to and from mobile stations. The mobile stations are used in wireless cellular networks where the geographical area covered by the network is divided into a number of cells. Each cell has a base station which communicates with mobile stations or other wireless terminals located in the cell associated with the base station. Typically, the GPRS standard is provided in conjunction with the Global System for Mobile communications GSM standard. The GSM standard relates to speech services. There are elements of the GSM standard and the GPRS standard which are in common.

In the GPRS standard, the mobile station is assigned a PDP packet data protocol address by either a Home Public Land Mobile Network HPLMN or by a Visitor Land Mobile Network VPLMN. The HPLMN is the network of the network operator to which the mobile station subscribes. The VPLMN is the network in which a mobile station may be located but which is not his own network. A roaming agreement may be in place between the VPLMN and the normal (home) network operator.

The address is a dynamic Internet Protocol IP address. This means that the address is allocated when needed and then released when it is no longer needed. The same address can be used at different times by different mobile stations. This dynamic address will only be known by the elements involved in the allocation of the address and the mobile station, and will not be known by the home location register HLR which stores information on the mobile station.

A server external to the GPRS system is able to communicate with the mobile station using the PDP address allocated to the mobile station. The server and the mobile station may communicate via the Internet, the IP address identifying the mobile station such that data from the server is sent via the Internet to the current network of the mobile station.

However if the server needs to know the location of the mobile station, it is difficult for the server to obtain this information as the address is a dynamic address, that is not unique to a given mobile station.

Another problem with known networks is that it is not possible to identify the position of IP devices such as portable computers. If the portable computer is connected to a mobile station, the position of the mobile station can be identified. However, there is no knowledge by an external location services client that a given portable computer is connected to a given mobile station. Accordingly, there is no knowledge about the position of the IP device.

In more detail, in GSM the mobile station is addressed by its mobile subscriber number MSISDN while for the Internet an IP address is used. The positioning in GSM is based on the MSISDN number or the mobile station itself requests the location of the mobile station using the MSISDN as a reference. The position of an external IP device connected to the mobile station will be unknown. This is because the information on the position of the mobile station cannot be used by an external IP application which does not know the MSISDN of the mobile station to which the IP device is connected. The problem is made worse by the fact that one IP device may be connected to different mobile stations at different times or even the same mobile station with different SIM cards. Thus it is not possible to position an IP device.

A further problem is that the same IP device may be connected at

different times to different networks. The networks may use GSM, GPRS or a third generation standard such as UMTS(Universal mobile telephone service)

## SUMMARY OF INVENTION

It is an aim of embodiments of the present invention to address this problem.

According to one aspect of the present invention, there is provided a method of providing information on the location of an first entity, said first entity being connectable to a communication network via a second entity, said method comprising the steps of defining an association between said first entity and a second entity; determining the position of said second entity; and providing information on the position of said second entity as information on the position of said first entity.

According to a second aspect of the present invention there is provided a network comprising a first entity and a second entity, said first entity being connectable to a communication network via a second entity, said network comprising means for storing an association between said first entity and a second entity whereby the location of said first entity is determined by determining the location of the second entity associated with said first entity.

According to a third aspect of the present invention there is provided a network comprising a first station which is in communication with at least one network element, said first station being arranged, in use, to establish communication with an element external to said network via said at least one network element, wherein said external network is arranged to send a request for information on the location of the first station to said first station, said request being carried via the same means as user information from the external network to the first station.

## BRIEF DESCRIPTION OF DRAWINGS

For a better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

Figure 1 shows a first embodiment of the present invention;  
Figure 2 shows a second embodiment of the present invention;  
Figure 3 shows a third embodiment in an UMTS system;  
Figure 4 shows a fourth embodiment of the present invention;  
Figure 5 shows a mobile originating request; and  
Figure 6 shows a modification of the fourth embodiment of the present invention.

## DESCRIPTION OF PREFERRED EMBODIMENTS OF INVENTION

Reference is made to Figure 1 which shows a first embodiment of the present invention in a GPRS environment. The mobile station 30 is connected to a SGSN (serving GPRS support node) 32. The SGSN 32 keeps track of the mobile stations location and performs security functions and access control. The functions of the SGSN are defined in the GPRS standard.

The SGSN 32 is connected to a GGSN (gateway GPRS support node) 34. The GGSN 34 provides interworking with external packet switched networks. The GGSN thus acts as a gateway between the GPRS network and an external network. Again the functions of the GGSN are defined in the GPRS standard. In this embodiment, the GGSN 34 is connected to the Internet 40 via which the GGSN 34 can communicate with a server 42. The server may be the provider of a web site or the like. The GPRS network will include other GPRS network elements which are omitted for clarity. In some embodiments of the present invention, the SGSN and the GGSN are integrated into one physical element.

The mobile station 30 has a dedicated port 31, the function of which will be described hereinafter. This port may be TCP/IP port



or a UDP/IP port. (TCP is the transmission control protocol, IP is Internet protocol and UDP is user datagram protocol. Both TCP and UDP are part of the TCP/IP suite maintained by the Internet Engineering Task Force IETF.)

The user of a mobile station 30 wants to access a web site of the server 42. The mobile station 30 therefore requests that an IP (Internet protocol) address be assigned to it. This request is made to the GGSN 34 via the SGSN 32. The GGSN 34 assigns an IP address to the mobile station 30. It should be appreciated that in this embodiment a different IP address is assigned to the mobile station each time a connection is made.

The mobile station then transmits a request packet to the server 42 which includes the address of the mobile station, the address of the server and information relating to the request for data. This packet is sent to the SGSN 32 which in turn forwards the packet to GGSN 34. The GGSN 34 forwards the packet to the Internet 40 which delivers the packet to the server 42 identified in the packet.

The SGSN 32 and the GGSN 34 may be transparent and the packet passed therethrough without modification. In this case, the address of the mobile station inserted in the packet by the mobile station will be the IP address. In the alternative, the GGSN 34 or the SGSN 32 may modify the format of the address of the mobile station before it is forwarded to the server 42. In the latter situation, data contained in the message is not altered. In particular, the GGSN 34 or SGSN 32 substitutes the mobile station's IP address for the address inserted by the mobile station.

The server 42 sends a reply packet to the mobile station 31 which includes the address of the mobile station, the address of the server and data requested by the mobile station. The GGSN 34 may be transparent to the reply packet, only identifying the mobile station from the IP address for which the message is intended and

directing the reply packet to the correct mobile station. The SGSN 32 may also be transparent to the reply packet. In this case, the server will insert the IP address of the mobile station in the reply packet.

In alternative embodiments of the present invention, the GGSN 34 or SGSN 32 may modify the reply packet before forwarding the message to the mobile station. The data contained in the message would not be altered. Where the GGSN or SGSN alters the address of the mobile station in packets from the mobile station to the server, the GGSN or SGSN may alter the address of the mobile station in the packet from the server to the mobile station so that the IP address of the mobile station is substituted for the address used by the mobile station.

The messages which pass between the mobile station and the server are in packet format.

If the server 42 wants or needs to know the location of the mobile station a message is sent to the dedicated port 31 of the mobile station. This port is identified by the IP address and the port number. A different port is used for the request and reply packets. The server thus sends the position request to the dedicated port of the mobile station's IP address. The server knows in advance that if it wants to know the position of the mobile station it should send this request to a predetermined port of the mobile station. All mobile stations using the GPRS network may use the same dedicated port 31 for this positioning request. Alternatively the mobile station may include information in the request packet as to the dedicated port which should be used for location requests. The request for location information sent to the mobile station will be in packet form and will comprise the identity of the dedicated port 31 and the IP address of the mobile station.

The mobile station is configured so that it knows that any request which it receives at its dedicated port is a position

request. When the mobile station 30 receives a position request from the server 42, the mobile station initiates a positioning determining procedure. The mobile station itself may calculate its position from information received from various of the network elements. Alternatively another network element may determine the position of the mobile station and provide that information to the mobile station.

The mobile station sends the position information back to the server 42 which uses it as required. This information is sent back via the dedicated port 31 of the mobile station.

In some embodiments, the mobile station can refuse to provide information on its position. The user may be provided with a message asking for confirmation as to whether or not information on the position of the mobile station can be sent. The mobile station may have three modes:

1. the mobile station always provides information on its position in response to a request;
2. the mobile station does not provide information on its position; and
3. the mobile station sometimes will provide information on its position and at other times not. This may depend on the identity of the server or the user may check each request and makes a decision on a case by case basis.

Any one of these modes may be selected. Alternatively, the mobile station may only provide one or two of these modes.

A transmission and optionally a signalling plane are defined between the mobile station and the server. The request reply packets and the request for location and reply packets are both sent on the transmission plane.

Reference is now made to Figure 2 which shows a block diagram of a second embodiment of the present invention. The mobile station

Using the IMSI information, the GGSN 138 requests the mobile station's MSISDN (mobile station International ISDN (Integrated

Services Digital Network)) from the HLR 134. This is the telephone number of the mobile station. The MSISDN is then sent by the GGSN 138 to the server 142 via the Internet 140. The server 142 then sends a request to the GMLC 136 via the Internet 140 requesting the position of the mobile station associated with the MSISDN included in the message sent by the server 142 to the GMLC 136. The GMLC 136 then arranges for the position of the mobile station associated with the MSISDN to be determined. The position of the mobile station is established using the normal positioning procedures. Once the GMLC 136 has determined the position of the mobile station or has been advised of the position of the mobile station, this information is sent to the server 142 via the Internet 140.

In a modification to this embodiment, a connection is provided between the GGSN 138 and the GMLC 136. Once the GGSN 138 has obtained the MSISDN from the HLR 134, the GGSN 138 sends this information to the GMLC 136 along with a request for the position of the mobile station associated with the MSISDN. When the GMLC has calculated or has received the position of the mobile station this is either sent back to the GGSN 138 or to the server 142 via the Internet 140.

If the position of the mobile station is sent back to the GGSN 138, the GGSN 138 forwards that information to the server 142 via the Internet. If the position of the mobile station is sent directly by the GMLC 136 to the server, the GGSN 138 will forward to the GMLC 138 information as to where the information on the position of the mobile station is to be sent.

In a further modification to the invention, the GGSN 138 is provided with a dedicated port which is arranged only to receive position requests for mobile stations and to send information on the position back to servers.

In this modification a server will send a position request to the dedicated IP port in the GGSN. The information sent by the server

Within the transmission plane signalling a protocol for enquiring about the MS location may be conveyed. The protocol can be a specific protocol on top of a transport layer protocol (UDP/TCP) with its own port number or it can be part of an existing

protocol and the MS location enquiry can be recognised using a specific message identifier within the existing protocol. Generally, the protocol is identified from the transport layer payload using an identifier in the transport layer protocol header. The protocol for enquiring about the location can also be intercepted from the transmission plane in the GGSN. This is the case in the second and third embodiments of the invention. Embodiments of the invention can be used with fixed network Internet access servers. This means that whenever an Internet access server recognises a specific user data enquiry protocol within the transmission plane it can check the user data associated with the access line (e.g. fixed network subscriber data such as calling line identifier) and send it to the enquiring user.

The location of the mobile station requested by the server may be the cell in which the mobile station is located or may be a more exact procedure. Any suitable procedure may be used. For example the geographic location can be determined using positioning procedures such as E-OTD.

The embodiments described hereinbefore have involved requests for the position of a mobile station. Embodiments of the invention are applicable to any other type of user equipment, which may be mobile or stationary. The user equipment may comprise computer terminals.

Reference will now be made to Figure 3 which shows an embodiment of the present invention of a third generation system using wideband code division multiple access WCDMA. In particular, Figure 3 shows a UMTS (Universal Mobile Telecommunications System) arrangement, which provides a packet data service. The data can be circuit switched or packet switched.

A mobile Internet protocol (IP) can be used in the GPRS/UMTS system of Figure 3. The arrangement of Figure 3 has a first network 200, which is the home network of a mobile station. The

mobile station can be any suitable type of mobile equipment ME 202. A second network is also provided and this is a network, which can be visited by the mobile equipment.

The first and second networks 200 and 204 are connected together via the Internet 205. The home network 200 has a home agent 206 and the visitor network has a foreign agent 208. As in the embodiment shown in Figure 2, a GMLC 210, 212 is provided in both the home network 200 and the visitor network 202.

A home agent is used to register the current care-of address of the mobile host.

In mobile IP, the home address is static and is used, for instance, to identify TCP connections. The care-of address changes at each new point of attachment and can be thought of as the mobile node's topologically significant address; it indicates the network number and thus identifies the mobile node's point of attachment with respect to the network topology. The home address makes it appear that the mobile node is continually able to receive data on its home network, where mobile IP requires the existence of a network node known as the home agent. Whenever the mobile node is not attached to its home network (and is therefore attached to what is termed a foreign network), the home agent gets all the packets destined for the mobile node and arranges to deliver them to the mobile node's current point of attachment.

Whenever the mobile node moves, it registers its new care-of address with its home agent. To get a packet to a mobile node from its home network, the home agent delivers the packet from the home network to the care-of address. The further delivery requires that the packet be modified so that the care-of address appears as the destination IP address. This modification can be understood as a packet transformation or, more specifically, a redirection. When the packet arrives at the care-of address, the



reverse transformation is applied so that the packet once again appears to have the mobile node's home address as the destination IP address. When the packet arrives at the mobile node, addressed to the home address, it will be processed properly by TCP or whatever higher level protocol logically receives it from the mobile node's IP (that is, layer 3) processing layer.

In mobile IP the home agent redirects packets from the home network to the care-of address by constructing a new IP header that contains the mobile node's care-of address as the destination IP address. This new header then shields or encapsulates the original packet, causing the mobile node's home address to have no effect on the encapsulated packet's routing until it arrives at the care-of address. Such encapsulation is also called tunnelling, which suggests that the packet burrows through the Internet, bypassing the usual effects of IP routing.

Foreign agent is a mobility agent on the foreign network that can assist the mobile node in receiving datagrams delivered to the care-of address.

Care-of address is an IP address at the mobile node's current point of attachment to the Internet, when the mobile node is not attached to the home network. A collocated care-of address is a care-of address assigned to one of the mobile node's network interfaces, instead of one being offered by a foreign agent.

A location service LCS client 214 is also provided. The location service client 24 is the party which requires the location so that for example a user is provided with information relating to his current location.

In the current third generation systems, there will be an authorisation, authentication and accounting (AAA) model. This model can be used for the distribution of location service

information such as position information. In the current Internet as well as future third generation mobile networks, there will be an AAA framework. The framework describes how clients can be authenticated in the Internet and how their authorization to the various services is provided. The AAA framework includes the retrieval of authentication information from directories. It also discusses how information on a given client's authority to access various services is recorded in the network.

The location service client 214 sends a request to the home agent 206. The connection between the location service client 214 and the home agent 206 is via the Internet 205. When the mobile station is in the home network, the home agent 206, which knows whether or not the mobile station is in the home network 200, will forward the request from the location service client 214 to the GMLC 210 of the home network 200.

The GMLC 210 of the home network 200 processes the request and obtains the location of the mobile station. This can be done in any of the ways previously described. The GMLC 210 forwards the information directly to the location service client 214 via the Internet 205. Alternatively, the GMLC 210 forwards the location information to the home agent 206 which in turn sends the information to the location service client 214. This is via the Internet 205.

When the mobile station is visiting another network 204, the request from the location services client 214 is forwarded to the home agent 206. The home agent 206 knows which network the mobile station is visiting and will forward the request the foreign agent 208. The home agent 206 and the foreign agent 208 are connected to each other via the Internet 205. The foreign agent 208 forwards the request to the GMLC 212 of the visited network 204. The GMLC 212 processes the request and obtains the position of the mobile station as discussed previously. The response from the GMLC 212 of the visited network 204 is sent to the location services client 214. This may, but not necessarily, be via the

foreign agent 208. The response is sent via the Internet 205. In an alternative embodiment of the invention, the reply from the GMLC 212 of the visited network 202 is returned to the home agent 206. This may or may not be via the foreign agent 208. The home agent will then send the response to the location services client.

The LCS client contacts the home agent (HA) of target subscriber. The HA authenticates and verifies the authority of the LCS client to request the location of the target subscriber. The authentication is done using a well known internet authentication algorithm such as Diffie-Hellman algorithm. The authentication data that verifies the identify to the LCS client and the authorization data that verify the authority of the LCS client to request the position of the target subscriber may be retrieved from a directory or policy service such as an LDAP or X.500 directory.

The HA checks the registration data in its database to find out the address of the foreign agent (FA) under which the target subscriber is currently registered. The HA contacts the FA to enquire the location of the target subscriber. At this point the FA may authenticate the HA and check its authority to enquire this kind of information from the foreign agent. The authentication and authorization data may be enquired from a directory or policy service. If the enquiry is authorized, the FA contacts the GMLC to enquire the location information. The target subscriber may have been identified using an IP address to the FA, so before the GMLC contact, the FA may have translated the IP address into an MSISDN address. The translation may occur as described earlier herein. After the enquiry is received by the GMLC, the location enquiry is served by the GMLC in accordance with the LCS specifications GSM 03.71 or 3GPP UMTS 23.071. The answer received to the GMLC is returned to the FA. The reply is forwarded from the FA to the HA. At this point the coordinate system of the reply may be converted to a coordinate required by the LCS client. For instance, GPS coordinates may be converted to

another coordinate format or vice versa.

The coordinate translation mechanism harmonizes the coordinates used in different types of FAs that are based on different technologies (GPRS, UMTS, WLAN, fixed). The coordinate translation mechanism or service could be in association with either FA or HA.

For instance, the FA may not be a GPRS FA in association with, for instance, a GGSN as assumed previously. Instead, the FA may be a FA within a wireless local area network (WLAN) or it may be a FA within a fixed local area network with fixed host location coordinates for each host in that network. In these cases, the coordinates returned by the FA to the HA may be in a different format than, if the coordinates returned by an FA in a GPRS network using GMLC for positioning. The coordinate system may differ in the granularity of the location coordinates.

Similarly, the coordinate system to which the coordinates are translated may be a human understandable position describing system such as e.g. country/city/street/house.

This embodiment can be used where the current location of the mobile station and its point of attachment to the network need to be kept confidential from the client. The home agent is a new point of attachment for the location services client and more particularly for the information requests from the location services client.

The protocol used in this embodiment can be based on either a system using an IP address for the mobile station and a port number or can be carried using the AAA model. The home agent may not access the GMLC associated with the visited network directly but instead the access is via the foreign agent. This has the advantage that location information can be requested from a variety of foreign agents. For example a foreign agent may be

based on wireless local area networks (WLAN) and could be provided with fixed coordinate information or GPS receivers.

It is possible for the request from the location services client to be sent directly to the GMLC 210, without going through the home agent. This may be implemented in some embodiments of the invention. The use of the home agent has some advantages. Firstly the location of the GMLC of the network with which the mobile station is currently located may be unknown. This may occur where the mobile station is roaming. The mobile station may want its location to remain confidential in respect of some or all the location client services requests. The foreign agent address is normally used by several mobile stations, making the identification of a specific mobile station difficult. There is a limited pool of care-of addresses at the foreign agent and these addresses can be occasionally deallocated. Therefore, an old care-of address may be reused quite soon. The direct use of the GMLC bounds the use only for GSM/GPRS/UMTS access.

The location request to the home agent or the foreign agent may be received by the specific authority in association with the respective home or foreign agent. The authority takes care of the previously mentioned authentication and authorisation procedures. The authority means may access the directory services or specifically AAA servers storing the authentication and authorization information.

The AA server or directory accessed by the home agent or its associated authorisation means typically stores information such as how to identify the LCS client and when identified whether the particular client has the authority to enquire about the location of the target subscriber.

In alternative embodiments of the present invention, the authorization, authentication and accounting model can be used. If so, mutual authentication of the location services client, the home agent and the foreign agent can be implemented. This means

that there can then be trust between the parties.

In one modification, a coordinate translation mechanism is provided for harmonising the coordinates used in different technologies. The coordinate translation mechanism could be association with either the foreign agent or home agent or both.

One alternative would be to obtain the GMLC address of the GMLC associated with the current location of the mobile station from the home agent.

Reference will now be made to Figure 4, which shows an embodiment in which the position of an IP device can be determined. An IP device is a portable or even fixed computer or any other Internet protocol device.

An IP device requests the identity of an access node and associates its own identity with the one in the access node. An external location server makes a similar association. The information for this is delivered by the IP device to the location server. The association is used to enable the positioning of the IP device in different access networks to be determined.

In Figure 4, an IP device 300 in the form of a laptop computer is connected to a mobile station 302 which is the access node. The embodiment is described in the context of a GSM network 304 which is the access network. There is an IP location server 306.

The following steps are carried out in order to enable the positioning of the IP device 300. In step S1 the IP device 300 sends an identity request to the mobile station 302. This message can include the IP address of the IP device to be used later for accepting further service requests.

In step S2, the mobile station answers the request by sending its MSISDN in an identity response message to the IP device. The

MSISDN may be provided, for example by the use of a SIM toolkit.

In step S3, the IP device 200 temporarily associates itself with the MSISDN.

In step S4, it is possible to start a mobile originating location request procedure MOLR or a mobile originating location push MO-Loc-push procedure. In the latter case, information about the association between the IP device 300 and the mobile station 302 can be delivered to the external location server 306.

In step S5, the IP device 300 starts a TCP/IP connection to an external network (not shown) using the GSM procedures.

In step S6, the IP device 300 sends information about itself, information about the mobile station 302 and information about the access network 304 to the IP location server 306. The information about the IP device may comprise its IP address. The information about the mobile station 302 may comprise its MSISDN and/or its PDP address. The information about the access network may comprises its identity.

It may in alternative embodiments of the present invention be possible for the IP device to send the information obtained in step S3 if required. For example, the IP location server may want to store some location information.

The IP location server 306 associates, in step S7, the received MSISDN with the IP address of the IP device. The positioning of the IP device 200 can be determined from the association with the MSISDN number.

Steps S5 to S7 may be omitted if the location server 306 has already received the required information in previous steps.

The TCP/IP connection is only one example. Other types of connection can be used in embodiments of the invention. The

signalling network may be used to send information to the external server.

With the embodiment described, it is possible to use the same static IP address in relation to a given IP device, regardless of the position of the IP device. The association based method is flexible. The associations are easy to make and easy to cancel. No changes to the GSM infrastructure or protocols are required. In some embodiments of the invention, the infrastructure and/or protocol may be changed. The IP device can be positioned independently of the access technology which in the described embodiment is GSM.

The inter working between the IP device 300 and the mobile station 302 may be based on any appropriate protocol.

Relevant protocols relating to location service function in GSM can be found in the following:

RRLP - GSM 04.31

LLP - GSM 04.71

BSSAP-LE - GSM 09.31

MAP - GSM 09.02

BSSLAP - GSM 08.71

SS - GSM 04.80

There are variations on the method by which the MSISDN can be obtained by the location server. It could be obtained from the mobile station, from the home location register (for example via SCP and MExE/SAT). Another alternative is that the IP addresses used or allocated are reported along with the MSISDN with MAP subscriber location report to the GMLC from the SGSN.

This embodiment is of course applicable to access networks other than GSM networks.

The IP address of a device can be fixed or can be changed.



In some embodiments of the present invention, more than one location server may be provided.

Reference will now be made to Figure 6 which shows a variation of the method of Figure 4. Again in the arrangement of Figure 6, a temporary association is made between the mobile station and the IP device.

In the first step S1, the IP device 500 authenticates itself with the mobile station 502. In this embodiment, the IP device is a portable computer but can be any suitable device. The IP device 500 is in one of two states, a connected state or an unconnected state. Whenever the IP device 500 is connected to the mobile station, the authentication procedure of step S1 is executed. However, when the IP device 500 is in the unconnected state, then any procedure which relates to the positioning of the IP device is aborted. The authentication can take any suitable format. For example, the IP device 500 can provide a personal identification number (PIN) to the mobile station 502. If the number is correct, the IP device 500 is authenticated by the mobile station 502. If the PIN code is incorrect, the IP device 500 may be permitted to retry the authentication for a certain number of times. The mobile station 502 may indicate to the IP device 500 when it has been correctly authenticated.

Alternatively, the IP device 500 may provide the PINcode to a server in the network. The network may be a GSM network, a GPRS network or a UMTS network or indeed any other suitable network. The server in the network will make the necessary authentication. The second alternative may be preferable to the first in that it is safer. However, the network must support the authentication. This may mean that in some implementations of the present invention, it may be preferable to use the first alternative.

The network authentication procedure may be based on a SIM

In step S6, the IP device 500 has two options to deliver the recently allocated IP address to an IP location server 506 in the internet. In step S6a, the IP device requests the mobile station 502 to deliver the IP address to an external client, that is the location centre 506 using the GPRS/GSM or UMTS specific internal

signalling procedures, such as the mobile originated location request. Alternatively, as shown in step S6b, the IP device 500 may start an IP connection to the IP location server 506 and deliver the IP address and the mobile station identity, for example the MSISDN to the IP location server 506.

In the final step S7, the IP location server 506 makes an association between the MSISDN number and the IP address. The server is ready to start locating the IP device by sending a location request to for example a gateway mobile location centre (GMLC) with the information of the MSISDN and the IP address.

It should be appreciated that any other suitable identity of the mobile station may be used instead of the MSISDN.

Embodiments of the present invention allow the IP device to be positioned reliably via its attached network which can be any suitable network. If the network is a GSM network, the GSM has specific infra structure and methods may be used without modification. It is advantageous that no changes to the GSM infra structure or the protocols are required. However, it should be appreciated that in alternative embodiments of the present invention, infra structure or protocol modifications may be made to the GSM system.

The association between the IP address and the MSISDN can be made known by external clients such as the IP location server. Association can also be used by the IP location server to position the IP device. Thus, the IP device is able to use the IP address to request its own position without the intervention of an IP location centre by using the networks internal procedures which are usually regarded as being secure and reliable.

The following procedure which is described in relation to Figure 5, allows an MS to request either its own location, location

assistance data or broadcast assistance data message ciphering keys from the network. This is referred to as a mobile originating location request MO-LR. Location assistance data may be used subsequently by the MS to compute its own location throughout an extended interval using a mobile based position method. The ciphering key enables the MS to decipher other location assistance data broadcast periodically by the network. The MO-LR after location update request may be used to request ciphering keys or GPS assistance data using the follow-on procedure described in GSM 04.08. The procedure may also be used to enable an MS to request that its own location be sent to another LCS client.

The following steps of the procedure will now be described with reference to Figure 5.

Step 1) If the MS is in idle mode, the MS requests an SDCCH and sends a DTAP CM service request indicating a request for call independent supplementary services to the BSC.

Step 2) The base station controller BSC includes the current cell ID and TA value within the BSSMAP Complete Layer 3 Information message used to convey the CM service request across the A-interface. If the MS is instead in dedicated mode, the MS sends a DTAP CM Service Request on the already established SACCH: the visitor mobile services switching center VMSC will then already have been supplied with the current cell ID from either the serving BSC or serving MSC in the case of an established call with MSC-MSC handover.

Step 3) The VMSC instigates authentication and ciphering if the MS was in idle mode or returns a DTAP CM Service Accept if the MS was in dedicated mode.

Step 4) The MS sends a DTAP LCS MO-LR invoke to the VMSC. If the

MS is requesting its own location or that its own location be sent to another LCS client, this message carries LCS quality of service QoS information (e.g. accuracy, response time). If the MS is requesting that its location be sent to another LCS client, the message shall include the identity of the LCS client and may include the address of the GMLC through which the LCS client should be accessed. If a GMLC address is not included, the VMSC may assign its own GMLC address and may verify that the identified LCS client is supported by this GMLC. If a GMLC address is not available for this case, the VMSC shall reject the location request. If the MS is instead requesting location assistance data or ciphering keys, the message specifies the type of assistance data or deciphering keys and the positioning method for which the assistance data or deciphering applies. The VMSC verifies in the MS's subscription profile that the MS has permission to request its own location, request that its location be sent to another LCS client or request location assistance data or deciphering keys (whichever applies). If the MS is requesting positioning and has an established call, the VMSC may reject the request for certain non-speech call types.

Step 5) The VMSC sends a BSSMAP-LE PERFORM LOCATION request message to the SMLC associated with the MS's current cell location if the SMLC is NSS based. This message is transported using SCCP connection orientated signaling inside an SCCP Connection Request message. The BSSMAP-LE message indicates whether a location estimate or location assistance data is requested and includes the MS's location capabilities and current cell ID. If the MS's location is requested, the message also includes the currently assigned radio channel type (SDCCH, TCH-FR or TCH-HR), the requested QoS and, if available and any location measurement information including the TA value received from the BSC in step 2. If location assistance data is instead requested, the message carries the requested types of location assistance data.

Step 6) If the SMLC is BSS based, the VMSC instead sends the BSSMAP PERFORM LOCATION message to the serving BSC for the target MS.

Step 7) In the case of a BSS based SMLC, the BSC forwards the BSSMAP-LE PERFORM LOCATION request received in step 6 to the SMLC. If the MS's location is requested, the BSC may add additional measurement data to the message to assist with positioning. The message is transported inside an SCCP connection request.

Step 8) If the MS is requesting its own location, the actions described under step 10 for a MT-LR are performed. If the MS is instead requesting location assistance data, the SMLC transfers this data to the MS as described in subsequent sections. The SMLC determines the exact location assistance data to transfer according to the type of data specified by the MS, the MS location capabilities and the current cell ID.

Step 9) When a location estimate best satisfying the requested QoS has been obtained or when the requested location assistance data has been transferred to the MS, the SMLC returns a BSSMAP-LE Perform Location response to the VMSC if the SMLC is NSS based. This message carries the location estimate or ciphering keys if this was obtained. If a location estimate or deciphering keys were not successfully obtained or if the requested location assistance data could not be transferred successfully to the MS, a failure cause is included in the Perform Location response.

Step 10) For a base station subsystem BSS based SMLC, the BSSMAP-LE Perform Location response is instead returned to the serving BSC.

Step 11) In the case of a BSS based SMLC, the BSC forwards the

BSSMAP PERFORM LOCATION response received in step 10 to the VMSC.

Step 12) If the MS requested transfer of its location to another LCS client and a location estimate was successfully obtained, the VMSC shall send a MAP Subscriber Location Report to the GMLC obtained in step 4 carrying the MSISDN of the MS, the identity of the LCS client, the event causing the location estimate (MO-LR) and the location estimate and its age.

Step 13) The GMLC shall acknowledge receipt of the location estimate provided that it serves the identified LCS client and the client is accessible.

Step 14) The GMLC transfers the location information to the LCS client either immediately or upon request from the client.

Step 15) The VMSC returns a DTAP LCS MO-LR Return Result to the MS carrying any location estimate requested by the MS, ciphering keys or a confirmation that a location estimate was successfully transferred to the GMLC serving an LCS client.

Step 16) The VMSC may release the CM, MM and RR connections to the MS, if the MS was previously idle, and the VMSC may record billing information.

In the Figure 5, the VMSC can be replaced by a SGSN. This means that steps similar to ones executed in the VMSC can also be executed in an SGSN.

When the IP address active has been reported to the GMLC it is possible for a client to identify using an IP address, the IP device and the associated mobile station whose position is being enquired.

The message at step 12 can be used to carry the IP addresses

active for the mobile station, that is the devices whose position can be inquired from the GMLC.

Aspects of the different embodiments described may be used together.

It should be appreciated that whilst the embodiments of the present invention have been described in the context of specific networks, embodiments of the present invention can be in the context of any other suitable network. Embodiments of the invention are applicable to packet data networks and circuit switched networks. The data may be in accordance with the Internet protocol or similar packet data protocol.

Whilst embodiments of the present invention have been described in the context of a wireless network, embodiments of the present invention can also be used with wired networks.



19-09-2001

10018313.050901B0000695

ART 34 AMDT

29

## CLAIMS

1. A method of providing information on the location of an first entity, said first entity being connectable to a communication network via a second entity, said method comprising the steps of:

defining an association between said first entity and a second entity, said association comprising information identifying said first entity and information identifying said second entity;

determining the location of said second entity; and based on said association, providing information on the location of said second entity as information on the location of said first entity.

2. A method as claimed in claim 1, further comprising the step of storing association between the first entity and the second entity.

3. A method as claimed in claim 2, wherein the association is stored in a store external to said network.

4. A method as claimed in claim 3, wherein said store is arranged to store information identifying said network.

5. A method as claimed in any preceding claim, comprising the step of the first entity requesting identifying information from the second entity.

6. A method as claimed in claim 3 or any claim appended thereto, further comprising the step of the first entity sending information identifying said second entity to said store.

7. A method as claimed in claim 3 or any claim appended

ART 34 AMDT

30

thereto, wherein the first entity sends information identifying the first entity to the store.

8. A method as claimed in any preceding claim, wherein said communication network is a wireless network.

9. A method as claimed in any preceding claim, wherein said network is a cellular network.

10. A method as claimed in any preceding claim wherein said second entity is a mobile terminal.

11. A method as claimed in claim 10, wherein said information identifying said mobile terminal is one or more of its MSISDN and its PDP address.

12. A method as claimed in any preceding claim, wherein said first entity is an IP entity.

13. A method as claimed in claim 12, wherein said information identifying said IP entity is an IP address.

14. A method as claimed in any preceding claim, wherein said first entity is a portable computer.

15. A method as claimed in any preceding claim, wherein an authentication procedure is performed between the first entity and the second entity.

16. A method as claimed in any of claims 1 to 14, wherein an authentication procedure is performed between the first entity and the communication network.

17. A method as claimed in any preceding claim, wherein said first entity is arranged to request an IP address and said network allocates an address.

APT 34 AMDT

31

18. A method as claimed in any preceding claim, wherein the first identity is arranged to establish a connection with an IP location service provider and to provide the IP location service provider with the information identifying the first entity and the information identifying the second entity.

19. A method as claimed in any preceding claim, wherein the information identifying the first entity and the information identifying the second entity is provided to an IP location server via the communications network.

20. A method as claimed in any preceding claim, wherein the first entity is provided with information relating to the identity of the second entity.

21. A network comprising a first entity and a second entity, said first entity being connectable to a communication network via a second entity, said network comprising means for storing an association between said first entity and a second entity, said association comprising information identifying said first entity and information identifying second entity, whereby the location of said first entity is determined by determining the location of the second entity associated with said first entity.

22. A network comprising a first station and an entity which is arranged to store information relating to the location of said first station, at least one network element being provided between the first station and said entity, said entity being arranged to receive requests relating to the location of said first station from a requester external to said network.

23. A network as claimed in claim 22, wherein said entity has an interface with an external element.

24. A network as claimed in claim 23, wherein said external element is a communications element which permits the entity to communicate to outside said network.

ART 34 ANDT

32

25. A network as claimed in claim 22 or 23, wherein said external element is the Internet.

26. A network as claimed in any of claims 22 to 25, wherein said requester communicates with said entity via said external element.

27. A network as claimed in any of claims 22 to 26, wherein a plurality of networks are provided, said networks being arranged to communicate via said external element.

28. A network as claimed in claim 27, wherein said entity is arranged to store information defining in which network said first station is in.

29. A network as claimed in claim 27 or 28, wherein each of said networks comprises an entity.

30. A network as claimed in any of claims 22 to 29, wherein said entity is arranged to forward the request to a respective network element in accordance with the information stored in said entity.

31. A network as claimed in claim 30, wherein said network element is a GMLC.

32. A network as claimed in claim 30 or 31, wherein said network element is arranged to direct a response back to said requester.

33. A network element as claimed in claim 27, wherein if said first station is in a different network, the request from the requester is forwarded by the entity to the network in which the first station is located.

34. A network comprising a first station which is in communication with at least one network element, said first

ART 34 AMDT

33

station being arranged, in use, to establish communication with an element external to said network via said at least one network element, wherein said external network is arranged to send a request for information on the location of the first station to said first station, said request being carried via the same means as user information from the external network to the first station.

35. A network as claimed in claim 34, wherein a transmission plane is provided between said first station and said external network, said request and user information being sent to the first station via the transmission plane.

36. A network as claimed in claim 34 or 35, wherein one of said first station and said at least one network element is provided with a dedicated address for receiving the request from said external network for information as to the location of the first station.

37. A network as claimed in claim 36 wherein information on the location of the first station is provided to said external network via said dedicated address.

38. A network as claimed in claim 36 or 37, wherein said dedicated address is a dedicated port within a user address.

39. A network as claimed in claims 36, 37 or 38, wherein the user information is received by and/or transmitted from a location in one of said first station and at least one network which is different to the dedicated address.

40. A network as claimed in any one of claims 33 to 39, wherein said first station is allocated an address, said address being unique to said first station.

41. A network as claimed in any one of claims 34 to 39, wherein said first station is allocated an address, said address being

ART 34 AMDT

34

reallocated to different first stations when no longer required by said first station.

42. A network as claimed in claim 41, wherein said address is allocated by said at least one network element.

43. A network as claimed in claim 36 or any claim appended thereto, wherein said dedicated address is located in said first station.

44. A network as claimed in claim 43, wherein said at least one network element is transparent to information sent between said first station and said external network.

45. A network as claimed in claim 43 or 44, wherein said first station is arranged to obtain information as to its position in response to a request received at its dedicated address.

46. A network as claimed in claim 45, wherein the first station is arranged to calculate the position of the first station.

47. A network as claimed in claim 45, wherein said first station receives information as to its position.

48. A network as claimed in any of claims 43 to 47, wherein said request from the external network includes information identifying the first station and the dedicated address.

49. A network as claimed in any of claims 43 to 48, wherein said at least one network element is arranged to check requests from the external network to the first station and if a request identifies the dedicated address, to initiate a procedure for providing information to the external network relating to the position of the first station.

50. A network as claimed in any of claims 33 to 42, wherein said dedicated address is in said at least one network element.

ART 34 AMDT

35

51. A network as claimed in claim 49 or 50, wherein said at least one network element is arranged to obtain information identifying said first station in response to a request for the position from said external network.

52. A network as claimed in claim 51, wherein said information is the dialling number of said first station.

53. A network as claimed in claim 51 or 52, wherein said information identifying the first station is forwarded to a further network element, said further network element being arranged to provide information on the position of the first station identified by said information.

54. A network as claimed in claim 53, wherein said position information is provided to the external network by said further network element directly or via said at least one network element.

55. A network as claimed in claim 50 or 51, wherein said information identifying said first station is sent to the external network, said external network sending a further request to a further network element including said identifying information requesting information on the position of the first station, said information being forwarded to said external network.

56. A network as claimed in any of claims 51 to 55, wherein said at least one network element obtains said information on the identity of the first station from a register.

57. A network as claimed in any one of the claims 33 to 56, wherein said first station comprises a mobile station.

58. A network as claimed in any one of the claims 33 to 57, wherein said network is a GPRS network.

59. A network as claimed in claim 58, wherein said at least one network element is a GGSN.

60. A network as claimed in claim 58 or 59 when appended to claim 52 or 54, wherein said further network element is a GMLC.

61. A network as claimed in any one of claims 33 to 60, wherein said external network is connected to said network via the Internet.

62. A network as claimed in any one of claims 33 to 61, wherein said network is a packet data network.

63. A network as claimed in any of the claims 33 to 62, wherein said request for information on the location of the first station relates to the geographic location of said first station.

64. A network as claimed in any of claims 33 to 63, wherein said request for information on the location of first station causes a geographic positioning procedure to be started by said first station.

65. A network comprising a first station which is in communication with at least one network element, said first station being arranged, in use, to establish a connection with an element external to said network via said at least one network element, wherein one of said first station and said at least one network element is provided with a dedicated address for receiving a request from said external network as to the location of the first station.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number  
**WO 00/76171 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 29/06,**  
**G01C 21/20**

FIN-02150 Espoo (FI), RUUTU, Ville [FI/FI]; Ilmansu 2  
D 4, FIN-02210 Espoo (FI).

(21) International Application Number: **PCT/IB00/00695**

(74) Agent: **STYLE, Kelda, Camilla, Karen; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).**

(22) International Filing Date: **8 May 2000 (08.05.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
9913453.8 9 June 1999 (09.06.1999) GB  
0005378.5 6 March 2000 (06.03.2000) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): **NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).**


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and  
(75) Inventors/Applicants (*for US only*): **WANTTINEN, Veijo [FI/FI]; Mustarinne 8, FIN-02770 Espoo (FI). TANG, Haitao [CN/FI]; Pekankatu 5 D 73, FIN-00700 Helsinki (FI). STAACK, Jens [DE/FI]; Plancettie 12 d 54, FIN-00420 Helsinki (FI). SOININEN, Jonne [FI/FI]; Urheilukatu 32 a 11, FIN-00250 Helsinki (FI). MUHONEN, Ahti [FI/FI]; Nokia Networks OY, Keilalahdentie 4,**

Published:  
— With international search report.


For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **DETERMINATION OF THE POSITION OF A MOBILE TERMINAL**

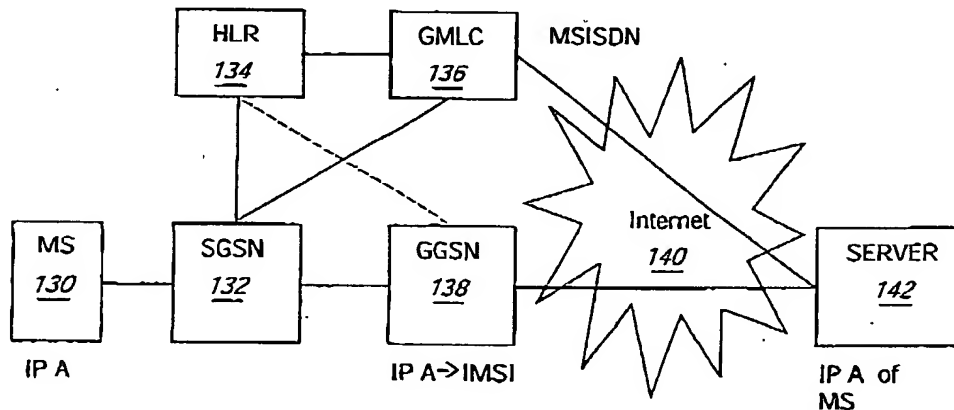

(57) Abstract: A method of providing information on the location of a first entity, said first entity being connectable to a communication network via a second entity, said method comprising the steps of defining an association between said first entity and a second entity; determining the position of said second entity; and providing information on the position of said second entity as information on the position of said first entity.

Rec'd PCT/PTO 07 DEC 2001



WO 00/76171 A1

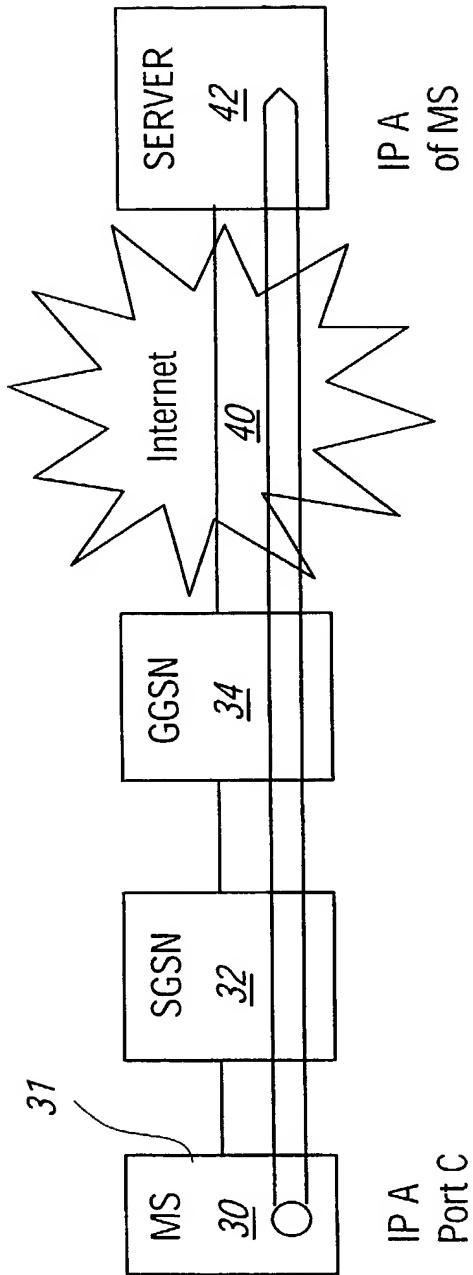


FIG. 1

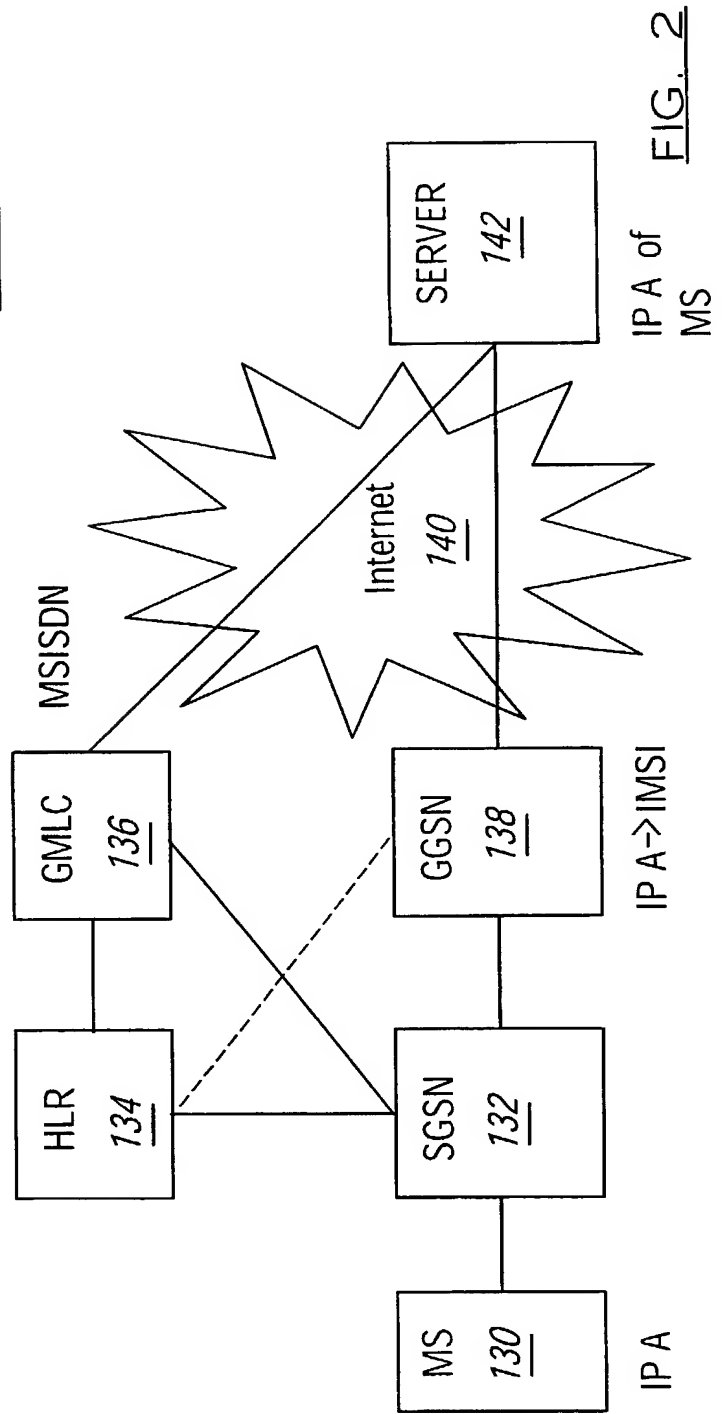


FIG. 2

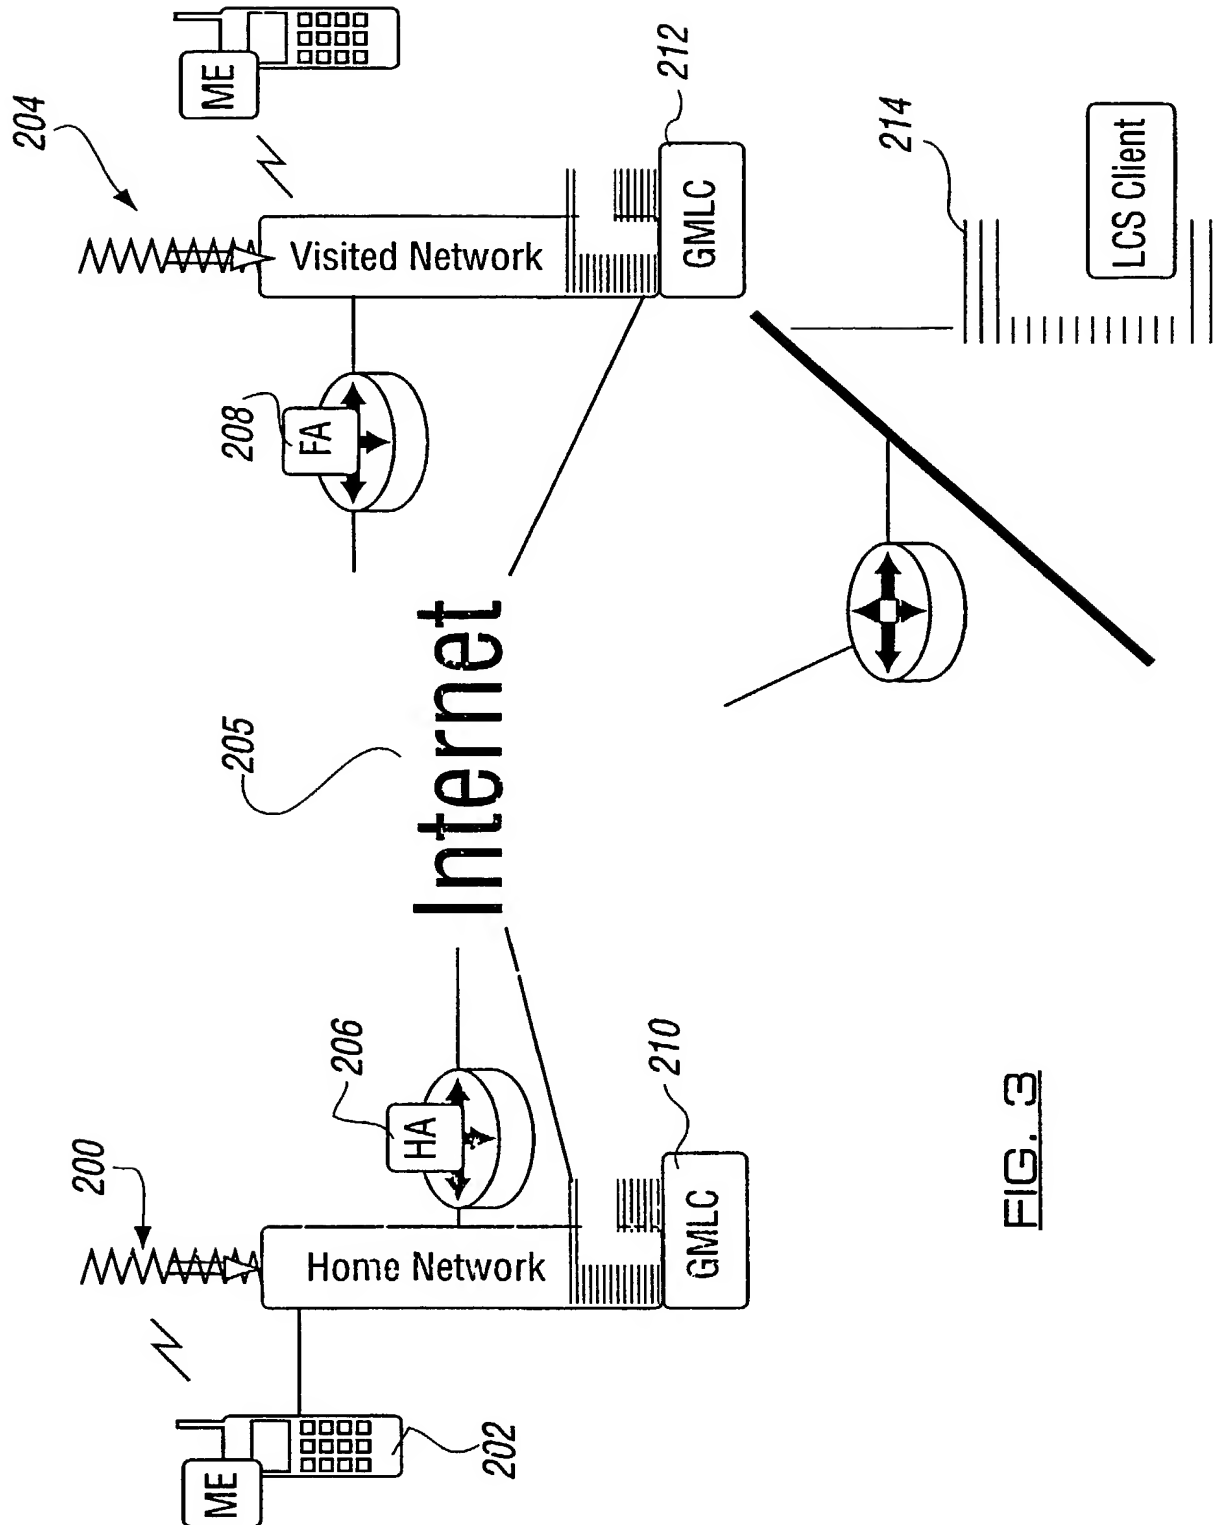


FIG. 3

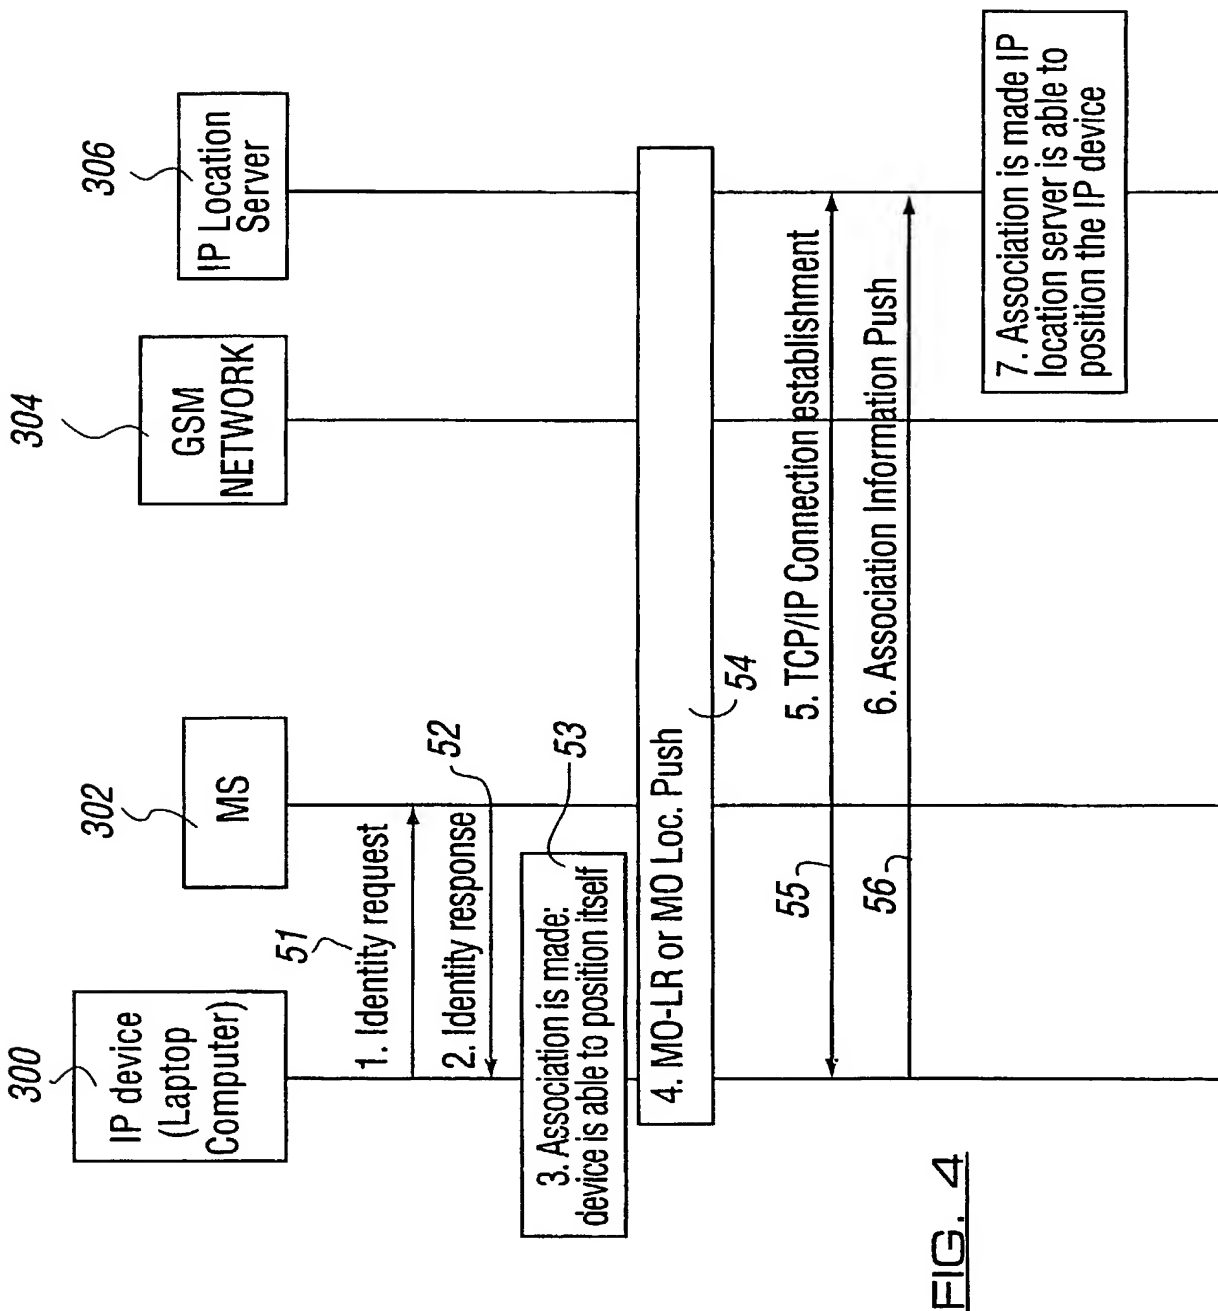


FIG. 4

4/5

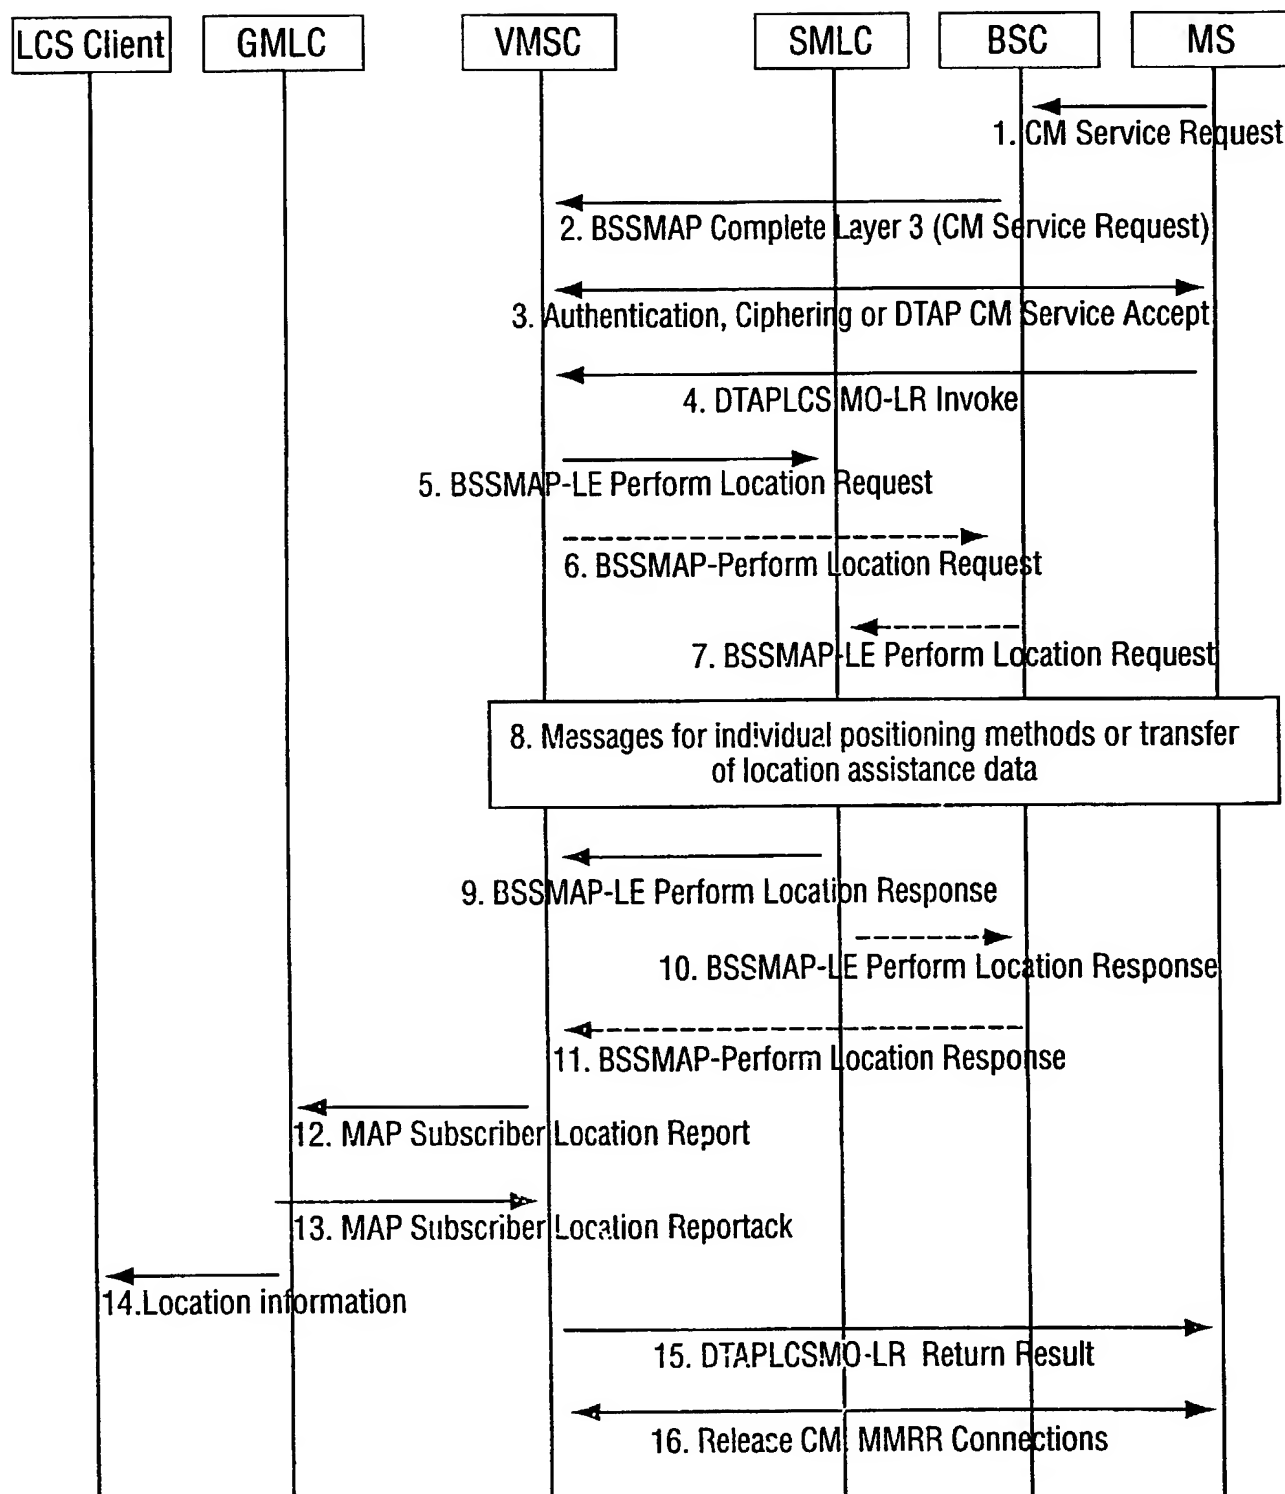


FIG. 5

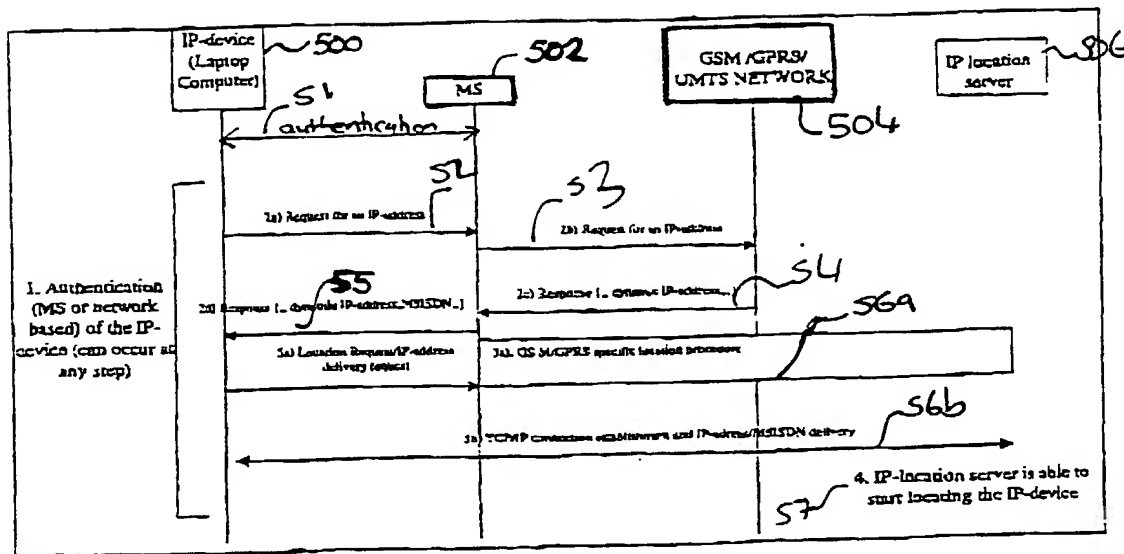


Figure 6

DOCKET NO.: NOKI14-00014

PATENT

DECLARATION AND POWER OF ATTORNEY

As a below named joint inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention, design or discovery entitled:

**“DETERMINATION OF THE POSITION OF A MOBILE TERMINAL”**

the specification of which was filed on December 7, 2001 and assigned Serial No. 10/018,313.

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability of this application as defined by Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				Yes	No
PCT/IB00/00695	PCT	08/05/2000	9	9	:
9913453.8	Great Britain	09/06/1999	9	9	:
0005378.5	Great Britain	06/03/2000	9	9	:

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in § 1.56 which became available between the filing date of any prior application(s) and the national or PCT international filing date of this application.

APPLICATION SERIAL NO.	DATE FILED	STATUS

I hereby appoint:

3

Robert H. Kelly, Registration No. 33,922  
 Stephen J. Wyse, Registration No. 40,880  
 Tara K. Doyle, Registration No. 43,723

all of the firm of NOVA KOV DAVIS & MUNCK, P.C., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities under the Patent Cooperation Treaty.

Send correspondence to:

Docket Clerk  
P.O. Box 802432  
Dallas, Texas 75380

Direct telephone calls to:

Robert H. Kelly - (214) 922-9221

Atty. Docket No.:

NOKI14-00014

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under ' 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of first inventor:

FD Veijo Vantinen

Inventor's signature:

*Veijo Vantinen*

Date:

10.4.2002

Residence (City, County, State):

Espoo, Finland FI X

Citizenship:

Finnish

Post Office Address:

Mustarinne 8  
 FIN-02770  
 Espoo, FINLAND



2-0

Full name of second inventor:

Haitao Tang

Inventor's signature:

Haitao Tang

Date:

5.4.2002

Residence (City, County, State):

Helsinki, Finland

FI X

Citizenship:

P.R. China

Post Office Address:

~~Pekankatu 5 D 73~~

Kytösuontie

9 AS. 1

~~FIN-00700~~

FIN-00300

Helsinki, FINLAND

3-A

Jens, Staack

*[Handwritten signature]*

3.4.2002

Helsinki, Finland *FIX*


Finnish

Planeettitie 12 d 54  
FIN-00420  
Helsinki, FINLAND

Full name of fourth inventor:

4-0  
Jonne Soininen

Inventor's signature:



Date:

27.3.2002

Residence (City, County, State):

~~Helsinki, Finland~~ Mountain View, USA

Citizenship:

FINLAND

Post Office Address:

Urheilukatu 32 a 11

FIN-00250

Helsinki, FINLAND ~~FIX~~

Full name of fifth inventor:

5-0  
Ahti Muhonen

Inventor's signature:

Ahti Muhonen

Date:

4/4/2002

Residence (City, County, State):

Keilalahdentie, Finland FI

Citizenship:

FINNISH

Post Office Address:

Keilalahdentie 4  
FIN-02150  
Espoo, FINLAND

110012313 050902

60

Full name of sixth inventor:

Ville Ruutu

Inventor's signature:

Ville Ruutu

Date:

3.9.2002

Residence (City, County, State):

Espoo, Finland

FI X

Citizenship:

FINLAND

Post Office Address:

Illansuu 2 D 4  
FIN-02210  
Espoo, FINLAND